



# NORTEC

RF Products

## High Gain General Purpose Amplifier

### Model #: A110043000-0

### Electrical Specifications

**Frequency:** 360-500 MHz

**P1dB:** 4.0 Watts (36.0 dBm) (minimum)

**Gain:** 37 dB (min.)


**Gain Flatness:** +/- 1.5 dB

**Input VSWR:** 2.5:1 MAX

**Max DC current:** 1.8 A

**Supply Voltage:** 12 V (12.5 V max.)

**Absolute Max. Input RF:** 3 dBm

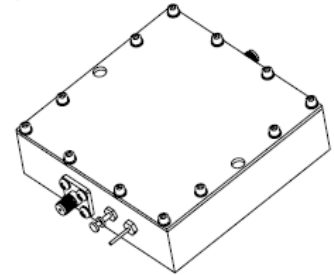



### Mechanical Specifications

**Connectors:** SMA (F)

**Enclosure:** Aluminum – clear irridite per MIL-C-5541 class 3

### NOTES

- The amplifier requires a small heat sink for cooling.
- Over-supply voltage protection.
- Over-current protection.
- Input/output ports should have 50 Ohm source/load, respectively.
- Open load is not recommended.
- Operating temperature is -35° C to 75° C

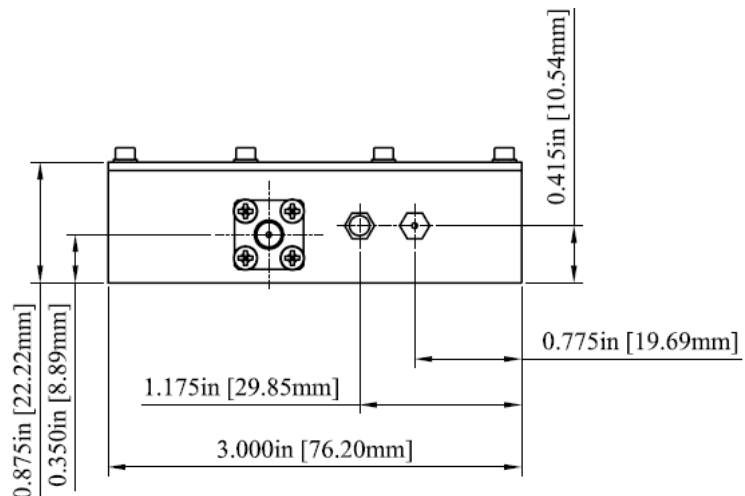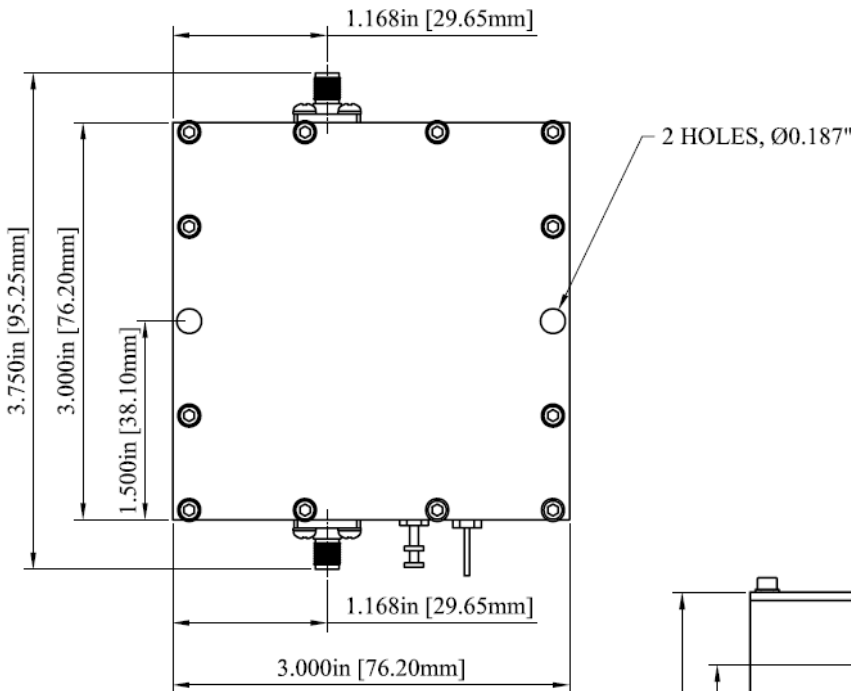



# NORTEC

RF Products

High Gain General Purpose Amplifier

Model #: A110043000-0

